



US006936066B2

(12) **United States Patent**  
**Palmaz et al.**

(10) **Patent No.:** **US 6,936,066 B2**  
(45) **Date of Patent:** **Aug. 30, 2005**

(54) **COMPLAINT IMPLANTABLE MEDICAL DEVICES AND METHODS OF MAKING SAME**

(75) Inventors: **Julio C. Palmaz**, San Antonio, TX (US); **Christopher T. Boyle**, San Antonio, TX (US)

(73) Assignee: **Advanced Bio Prosthetic Surfaces, Ltd.**, San Antonio, TX (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 386 days.

#### FOREIGN PATENT DOCUMENTS

JP	61-88135	5/1986	
WO	97/44692	11/1997	..... G02B/6/16
WO	98/13537	4/1998	..... C25D/1/00
WO	98/45506	10/1998	..... C25D/7/04
WO	99/16385	4/1999	..... A61F/2/06
WO	99/23977	5/1999	..... A61F/2/06
WO	00/04204	1/2000	..... C23C/14/34
WO	00/18327	4/2000	..... A61F/2/06
WO	00/54704	9/2000	..... A61F/2/06
WO	01/21852	3/2001	..... C23C/14/34
WO	01/37892	5/2001	..... A61L/31/04
WO	01/43790	6/2001	..... A61L/33/02

(Continued)

(21) Appl. No.: **10/135,626**

(22) Filed: **Apr. 29, 2002**

(65) **Prior Publication Data**

US 2003/0028246 A1 Feb. 6, 2003

#### Related U.S. Application Data

(63) Continuation-in-part of application No. 09/443,929, filed on Nov. 19, 1999, now Pat. No. 6,379,383, and a continuation-in-part of application No. 09/532,164, filed on Mar. 20, 2000, now Pat. No. 6,537,310.

(60) Provisional application No. 60/302,797, filed on Jul. 3, 2001.

(51) Int. Cl.<sup>7</sup> ..... **A61F 2/06**

(52) U.S. Cl. .... **623/1.13**

(58) Field of Search ..... 623/1.11, 1.2, 623/1.13, 1.23, 1.25, 1.39; 606/191, 195, 198

(56) **References Cited**

#### U.S. PATENT DOCUMENTS

4,510,182 A	4/1985	Cornils et al.
4,751,099 A	6/1988	Niino et al.
4,846,834 A	7/1989	von Recum et al.
5,049,251 A	9/1991	Inone
5,061,914 A	10/1991	Busch et al.
5,084,151 A	1/1992	Vallana

(Continued)

#### OTHER PUBLICATIONS

"Liquid Sources for Chemical Vapor Deposition of Group 6 Metals and Metal Nitrides" by Gordon, et al., [www.techtransfer.harvard.edu/cgi-bin/TALSearch.cgi?full\\_report=1&case=3](http://www.techtransfer.harvard.edu/cgi-bin/TALSearch.cgi?full_report=1&case=3), Case No. 1709.

(Continued)

*Primary Examiner*—Kevin T. Truong


(74) *Attorney, Agent, or Firm*—David G. Rosenbaum, Rosenbaum & Associates, P.C.

(57)

#### ABSTRACT

Implantable medical grafts fabricated of metallic or pseudo-metallic films of biocompatible materials having a plurality of microperforations passing through the film in a pattern that imparts fabric-like qualities to the graft or permits the geometric deformation of the graft. The implantable graft is preferably fabricated by vacuum deposition of metallic and/or pseudometallic materials into either single or multi-layered structures with the plurality of microperforations either being formed during deposition or after deposition by selective removal of sections of the deposited film. The implantable medical grafts are suitable for use as endoluminal or surgical grafts and may be used as vascular grafts, stent-grafts, skin grafts, shunts, bone grafts, surgical patches, non-vascular conduits, valvular leaflets, filters, occlusion membranes, artificial sphincters, tendons and ligaments.

**19 Claims, 6 Drawing Sheets**

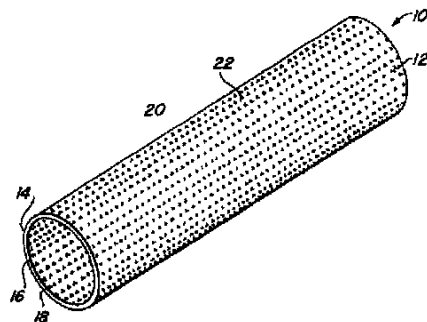

## U.S. PATENT DOCUMENTS

5,133,845	A	7/1992	Vallana et al.	6,015,429	A	1/2000	Lau et al.
5,242,710	A	9/1993	Claar et al.	6,019,784	A	2/2000	Hines
5,277,933	A	1/1994	Claar et al.	6,022,370	A	2/2000	Tower
5,370,684	A	12/1994	Vallana et al.	6,027,526	A	2/2000	Limon et al.
5,421,955	A	6/1995	Lau et al.	6,033,433	A	3/2000	Ehr et al.
5,477,864	A	12/1995	Davidson ..... 128/771	6,042,597	A	3/2000	Kveen et al.
5,514,154	A	5/1996	Lau et al.	6,042,605	A	3/2000	Martin et al. .... 623/1
5,540,820	A	7/1996	Terakado et al.	6,056,776	A	5/2000	Lau et al.
5,545,210	A	8/1996	Hess et al.	6,059,808	A	5/2000	Boussignac
5,569,295	A	10/1996	Lam	6,066,167	A	5/2000	Lau et al. .... 623/1
5,593,442	A	1/1997	Klein	6,066,168	A	5/2000	Lau et al.
5,603,721	A	2/1997	Lau et al.	6,066,169	A	5/2000	McGuinness ..... 623/1.16
5,605,714	A	2/1997	Dearnaley et al.	6,071,305	A	6/2000	Brown et al.
5,607,445	A	3/1997	Summers	6,090,136	A *	7/2000	McDonald et al. .... 623/1.23
5,607,463	A	3/1997	Schwartz et al.	6,096,175	A	8/2000	Roth
5,609,629	A	3/1997	Fearnott et al.	6,103,320	A	8/2000	Matsumoto et al. .... 427/535
5,628,788	A	5/1997	Pinchuk	6,113,750	A	9/2000	Shimura et al. .... 204/192.15
5,647,858	A	7/1997	Davidson ..... 604/264	6,120,536	A	9/2000	Ding et al. .... 623/11.43
5,649,951	A	7/1997	Davidson ..... 606/198	6,120,847	A	9/2000	Yang et al. .... 427/335
5,649,977	A	7/1997	Campbell ..... 623/1	6,124,523	A	9/2000	Banas et al. .... 623/11
5,656,036	A	8/1997	Palmaz	6,126,793	A	10/2000	Sugiyama et al. .... 204/192.23
5,683,453	A	11/1997	Palmaz	6,136,258	A	10/2000	Wang et al. .... 264/514
5,685,961	A	11/1997	Pourrezaei et al.	6,190,404	B1	2/2001	Palmaz et al. .... 623/1.15
5,690,670	A	11/1997	Davidson	6,202,304	B1	3/2001	Shatz ..... 29/896.6
5,723,219	A	3/1998	Kolluri	6,207,536	B1	3/2001	Matsumoto et al. .... 438/478
5,725,573	A	3/1998	Dearnaley et al.	6,245,104	B1	6/2001	Alt ..... 623/1.46
5,728,150	A	3/1998	McDonald et al. .... 623/1	6,264,687	B1	7/2001	Tomonto ..... 623/1.16
5,728,158	A	3/1998	Lau et al.	6,274,014	B1	8/2001	Matsumoto et al. ... 204/298.11
5,733,303	A	3/1998	Israel et al. .... 606/198	6,280,467	B1	8/2001	leonhardt ..... 623/1.16
5,735,896	A	4/1998	Amon et al.	6,287,277	B1	9/2001	Yan ..... 604/96.01
5,765,418	A	6/1998	Rosenberg	6,287,329	B1	9/2001	Duerig et al. .... 623/1.11
5,772,864	A	6/1998	Moller et al.	6,287,435	B1	9/2001	Drewery et al. .... 204/298.09
5,776,161	A	7/1998	Globerman	6,287,628	B1	9/2001	Hossainy et al. .... 427/2.3
5,780,807	A	7/1998	Saunders	6,290,720	B1	9/2001	Khosravi et al. .... 623/1.13
5,782,908	A	7/1998	Cahalan et al.	6,290,721	B1	9/2001	Heath ..... 623/1.15
5,782,910	A	7/1998	Davidson ..... 623/3	6,293,967	B1	9/2001	Shanley ..... 623/1.15
5,788,558	A	8/1998	Klein	6,299,604	B1	10/2001	Ragheb et al. .... 604/265
5,811,151	A	9/1998	Hendricks et al.	6,312,463	B1 *	11/2001	Rourke et al. .... 623/1.39
5,824,045	A	10/1998	Alt	6,315,708	B1	11/2001	Salmon et al. .... 600/3
5,824,049	A	10/1998	Ragheb et al.	6,315,794	B1	11/2001	Richter ..... 623/1.34
5,824,056	A	10/1998	Rosenberg	6,331,191	B1	12/2001	Chobotov ..... 623/1.44
5,840,009	A	11/1998	Fischell et al. .... 600/3	6,458,152	B1	10/2002	Khosravi et al. .... 623/1.13
5,843,117	A	12/1998	Alt et al.	2001/0000188	A1	4/2001	Lenker et al.
5,843,120	A	12/1998	Israel et al. .... 606/198	2001/0019847	A1	9/2001	Ori et al.
5,843,289	A	12/1998	Lee et al.	2001/0021870	A1	9/2001	Edwin et al.
5,849,206	A	12/1998	Amon et al.	2001/0025131	A1	9/2001	Edwin et al.
5,855,600	A	1/1999	Alt	2001/0032013	A1	10/2001	Marton
5,855,802	A	1/1999	Acciai et al.	2001/0037144	A1	11/2001	Kim et al.
5,855,955	A	1/1999	Claar et al.	2001/0039449	A1	11/2001	Johnson et al.
5,858,556	A	1/1999	Eckert et al.	2002/0013616	A1	1/2002	Carter et al.
5,866,113	A	2/1999	Hendricks et al.	FOREIGN PATENT DOCUMENTS			
5,868,782	A	2/1999	Frantzen	WO	01/49340	7/2001	..... A61L/31/18
5,873,904	A	2/1999	Ragheb et al.	WO	01/53559	7/2001	..... C23C/14/14
5,876,432	A	3/1999	Lau et al.	WO	01/55473	8/2001	..... C23C/14/00
5,879,370	A	3/1999	Fischell et al.	OTHER PUBLICATIONS			
5,895,406	A	4/1999	Gray et al.	"Fabrication of Small-Scale Coils and Bands as Photomasks			
5,899,935	A	5/1999	Ding	on Optical Fibers for Generation of In-Fiber Gratings,			
5,907,893	A	6/1999	Zadno-Azizi	Electromagnets as Micro-NMR Coils, Microtransformers;			
5,913,896	A	6/1999	Boyle et al.	and Intra-Vascular Stents", www.techtransfer.harvard.edu/			
5,919,225	A	7/1999	Lau et al.	cgi-bin/TALSearch.cgi?full_report=1&case=72, Case No.			
5,925,063	A	7/1999	Khosravi	1263.			
5,938,682	A	8/1999	Hojeibane et al.	"Reactions of Biological Cells to Nanostructures", by Cur-			
5,938,697	A	8/1999	Killion et al.	tis, et al., AVS 46 <sup>th</sup> International Symposium, Paper			
5,945,153	A	8/1999	Dearnaley	BI-WeM2 (Oct. 27, 1999).			
5,951,881	A	9/1999	Rogers et al.	"Biocompatibility of Cardiac Cells on Silane-Modified Sur-			
5,972,027	A	10/1999	Johnson	faces" AVS 46 <sup>th</sup> International Symposium, Paper BI-WeM5			
5,984,905	A	11/1999	Dearnaley et al.	(Oct. 27, 1999).			
6,007,573	A	12/1999	Wallace et al.				
6,013,054	A	1/2000	Jiun Yan ..... 604/96				
6,013,855	A	1/2000	McPherson et al. .... 623/11				

- "Biofunctionalization of Surfaces with Peptide Amphiphiles" AVS 46<sup>th</sup> International Symposium, Paper No. BI-WeM7 (Oct. 27, 1999).
- "Plasma Copolymer Surfaces for Cell Culture" AVS 46<sup>th</sup> International Symposium, Paper No. Paper BI-WeM9 (Oct. 27, 1999).
- "Plasma Co-polymer Surfaces for the Controlled Adsorption of Common Proteins" AVS 46<sup>th</sup> International Symposium, Paper No. BI-FrM2 (Oct. 29, 1999).
- "Biofilm—Titanium Chemistry of Adhesion Using X-ray Photoelectron Spectroscopy" AVS 46<sup>th</sup> International Symposium, Paper No. BI-FrM8.
- "Nanoscale Patterning of Gold for Attachment of Supported Lipid Bilayers" AVS 46<sup>th</sup> International Symposium, Paper No. BI-FrM10.
- "Benefits From Diamond-Like Coated Stainless Steel Stents", <http://www.phytis.com/stents0.htm>, pp. 1–2.
- "Adhesion of Bovine Serum Albumin on Coated DLC (Diamond-Like) and Uncoated (SiO<sub>2</sub>/TiO<sub>2</sub>) Sensor Chips", <http://www.phytis.com/stent4.htm>, pp. 1–2.
- "Flow Cytometric Investigation", <http://www.phytis.com/stent6.htm>, pp. 1–3.
- "Pre-clinical and Clinical Evaluation", <http://www.phytis.com/stent2.htm>, pp. 1B2.
- "The New Phytis Stent", <http://www.phytis.com/stent1.htm>, pp. 1–2.
- "Invulnerability and Resistance of DLC-Coating", <http://www.phytis.com/stent3.htm>, pp. 1–3.
- "Material In Use and Its Biocompatibility", <http://www.phytis.com/stent5.htm>, pp. 1–2.
- "Expertise Concerning the Implementation of the Phytis Diamond as Stent Performed at the Institute for Experimental Medicine (IEM)", <http://www.phytis.com/stent9.htm>, pp. 1.
- "Phytis L.D.A. Home Page information", <http://www.phytis.com/content/htm>, pp. 1–15.
- "Risk Analysis of Stents With a Diamond-Like Coated Surface For Use in Prosthetic Implants", <http://www.phytis.com/risk.htm>, pp. 1–6.
- "Directions for Use, Diamond AS® Stent", <http://www.phytis.com/direcuse.htm>, pp. 1–8.
- "Stents: Literature", <http://www.phytis.com/liter.htm>, pp. 1–8.
- "The Effects of Ion Irradiation on NiTi Shape Memory Alloy Thin Films" by E. Goldberg and E. Knystautas, *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 177–182 (1997).
- "Constitutive Parts of a Shape Memory Alloy Titanium Nickel Thin Film Catheter" by L. Buchailot, et al., *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 183–188 (1997).
- "The Effect of HCD Technological Factors on the NiTi SMA Film Thickness" by Q. Pingshan, et al., *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 173–176 (1997).
- "Microstructure of Ti-Rich TiNi Thin Films" by A. Ishida, et al., *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 161–166 (1997).
- "Thin Film Shape Memory Alloy Microactuators" by TiNi Alloy Company (online).
- "Progress in Thin Film Shape Memory Microactuators" by Johnson, et al., [www.sma-mems.com/recent.htm](http://www.sma-mems.com/recent.htm) (Overview), pp. 1–5.
- "A Concise History of Vacuum Coating Technology, Part 2: 1940 to 1975" by D. Mattox, [www.svc.org/HistoryofVac2.html](http://www.svc.org/HistoryofVac2.html), pp. 1–15.
- "Model Surfaces for Studying and Controlling the Adhesion of Cells" by M. Mrksich, AVS 47<sup>th</sup> International Symposium, Invited Paper No. BI+EL-TuA1 (Oct. 3, 2000).
- "Cell Response to Chemically and Topographically Modified Surfaces" by D.S. Sutherland, et al., AVS 47<sup>th</sup> International Symposium, Paper No. BI+EL-TuA3 (Oct. 3, 2000).
- "The Nanomechanical Properties of Thin Films" by J.E. Houston, AVS 47<sup>th</sup> International Symposium, Paper No. TF-TuA1 (Oct. 3, 2000).
- "Anomalous Plastic and Elastic Behaviors of Sputter-deposited TiNi with 10 or 20 Inserted Thin Al Layers Evaluated by Nanoindentation" by E. Kusano, et al., AVS 47<sup>th</sup> International Symposium, Paper No. TF-TuA3 (Oct. 3, 2000).
- "Recent Progress in the Application of Thin Film Shape Memory Alloys" by A.D. Johnson and J.D. Busch, *Proceedings of the First International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 299–310 (1994).
- "Thin-film Processing of TiNi Shape Memory Alloy" by J.A. Waker and K.J. Gabriel, *Sensors and Actuators*, A21–A23, pp. 243–246 (1990).
- "Sputter-deposition of TiNi, TiNiPd and TiPd films displaying the two-way shape-memory effect" by E. Quandt, et al., *Sensors and Actuators*, A 53, pp. 434–439 (1996).
- "Applications of Shape-Memory Alloy Thin Films" by A.D. Johnson and V.V. Martynov, *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 1–8 (1997).
- "The Characteristics of NiTi HCD-Deposited SMA Films" by H. Weixin, et al., *Proceedings of the Second International Conference on Shape Memory and Superelastic Technologies Asilomar Conference Center, Pacific Grove, California, USA*, pp. 167–172 (1997).
- "The influence of ion irradiation during film growth on the chemical stability of film/substrate systems" by W. Ensinger, *Surface and Coatings Technology*, vol. 80, pp. 35–48 (1996).
- "Sputtering Targets High-Quality Thin Film Materials" by AMETEK Specialty Metal Products online at [www.ametek84.com/fd-sputtering.html](http://www.ametek84.com/fd-sputtering.html), pp. 1–3.
- "Tissue Formation of Hepatocytes on Micro-Porous Films of Polylactide" by T. Nishikawa, et al., AVS 47<sup>th</sup> International Symposium, Paper No. BI+EL-TuA10 (Oct. 3, 2000).
- "Endothelial Cell Organization on Micropatterned Protein Surfaces" by R. Daw, et al., AVS 47<sup>th</sup> International Symposium, Paper No. BI-WeP21 (Oct. 4, 2000).
- "Shape Memory Properties in NiTi Sputter-deposited Film", by J.D. Busch and A.D. Johnson, *J Appl. Phys.*, vol. 68, No. 12, pp. 6224–6226 (Dec. 15, 1990).
- "Multicomponent Film Deposition by Target Biasing", *IBM Technical Disclosure Bulletin*, pp. 1–2 (Jul. 1980).







“The Experimental Use of Steel Mesh Tubes for the Replacement of Arterial Segments,” by Lary, Banning G., M.D., et al., *Presented at the Third Scientific Meeting of the North American Chapter of the International Society of Angiology, Atlantic City, N.J.*, pp. 69–75, Jun. 4, 1955.



Abstract: “Vacuum conditions for sputtering thin film TiNi” by A. Peter Jardine, *Journal of Vacuum Science & Technology A: Vacuum, Surfaces, and Films*, May 1995, vol. 13, Issue 3, pp. 1058–1062.

Abstract: “Oriented nickel–titanium shape memory alloy films prepared by annealing during deposition” by K. Gisser, J. Bussh and A. Johnson and A. Ellis, *Applied Physics Letters*, Oct. 1992, vol. 61, Issue 14, pp. 1632–1634.

Abstract: “Relative importance of bombardment energy and intensity in ion plating” by K.S. Fancoy, C.A. Porter and A. Matthews, *Journal of Vacuum Science & Technology A: Vacuum, Surfaces, and Films*, Mar. 1995, vol. 13, Issue s, pp. 428–435.

\* cited by examiner

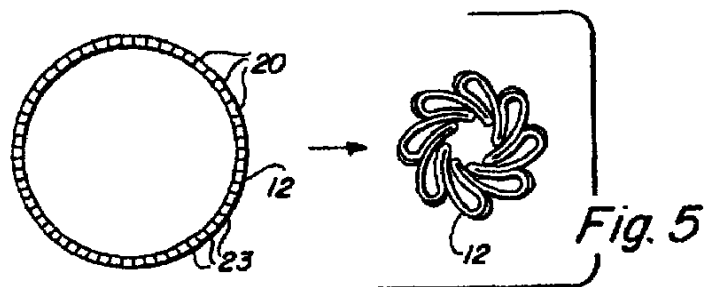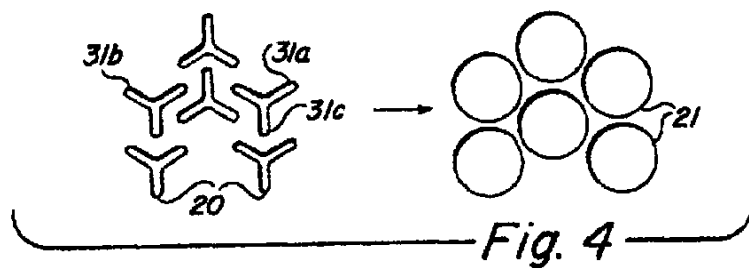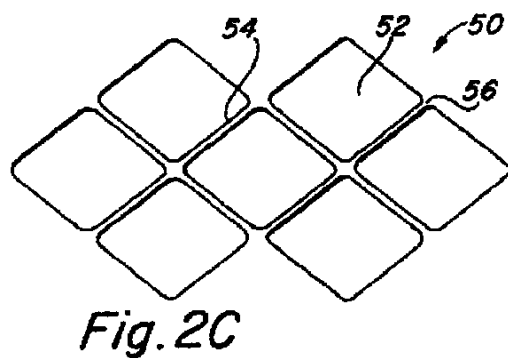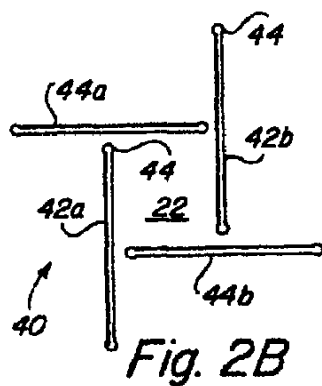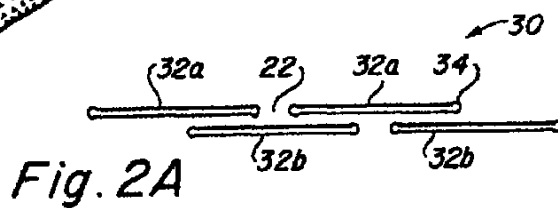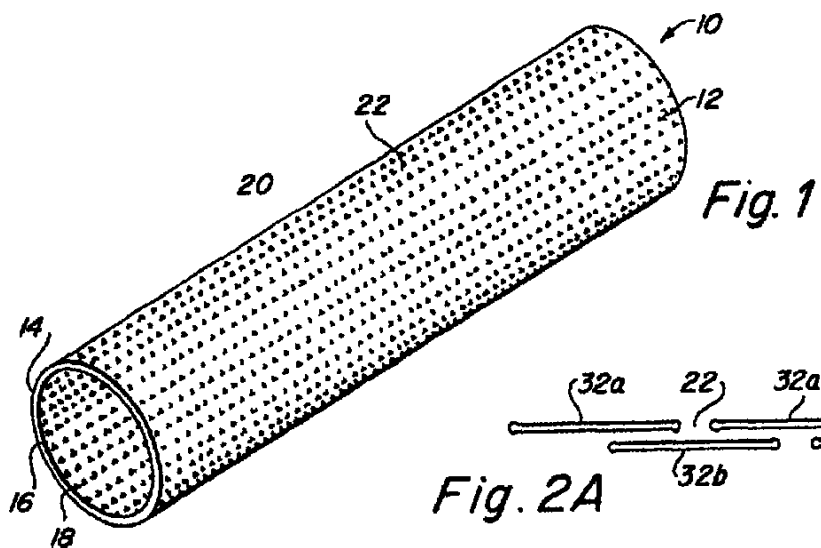

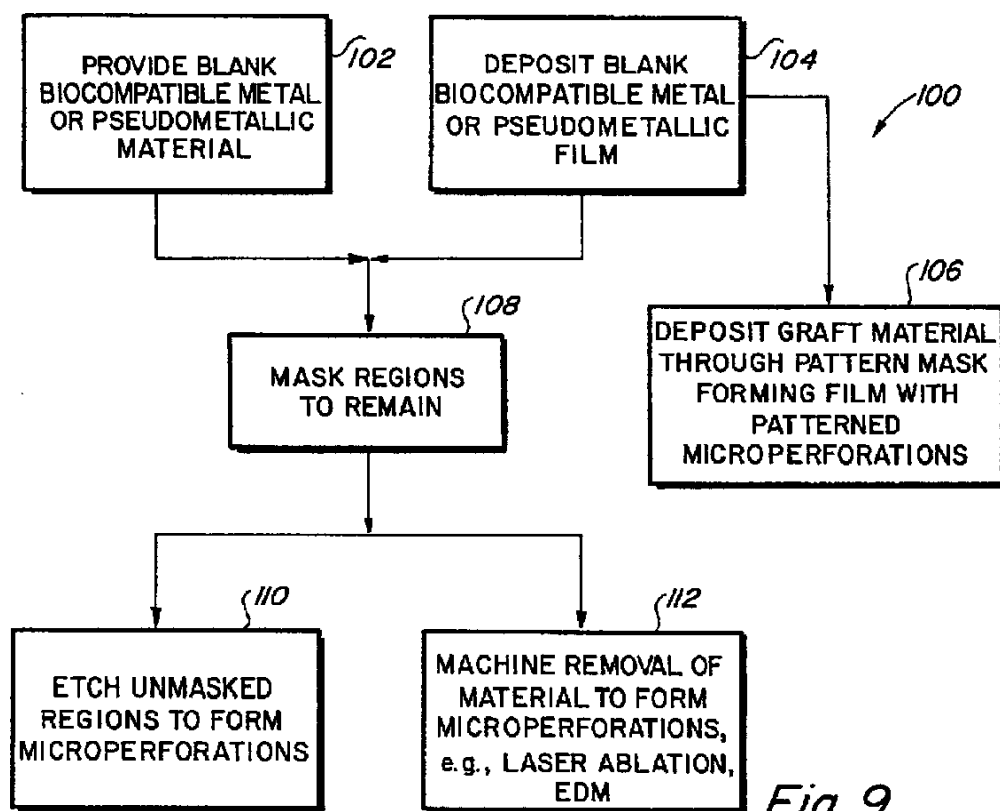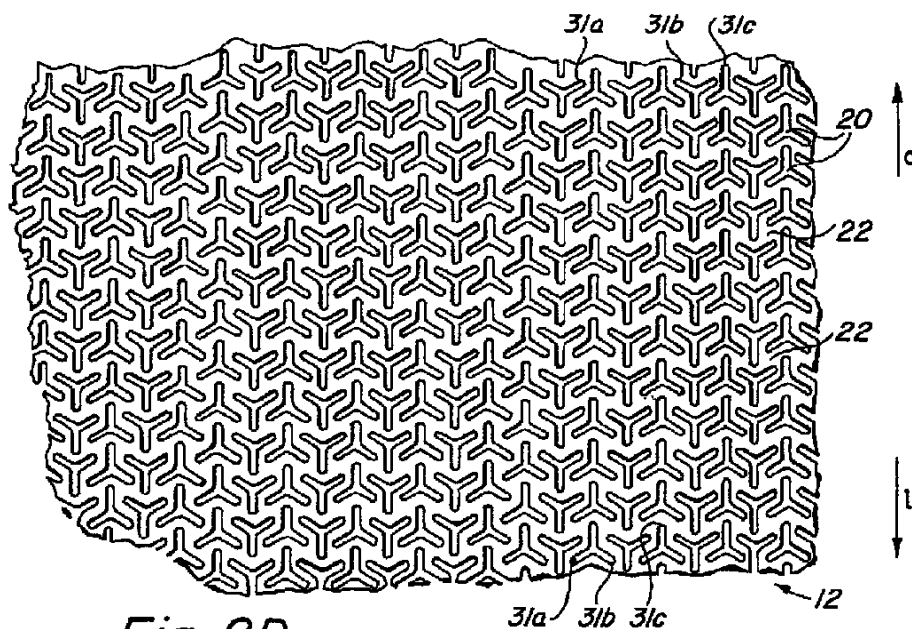




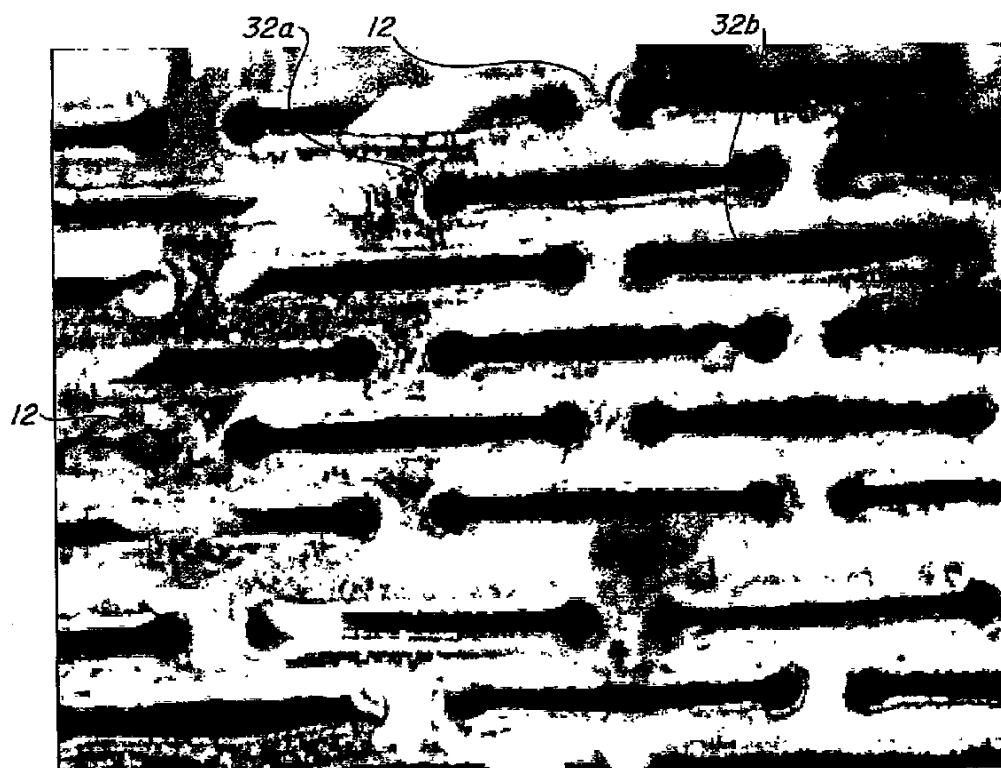


Fig. 3A

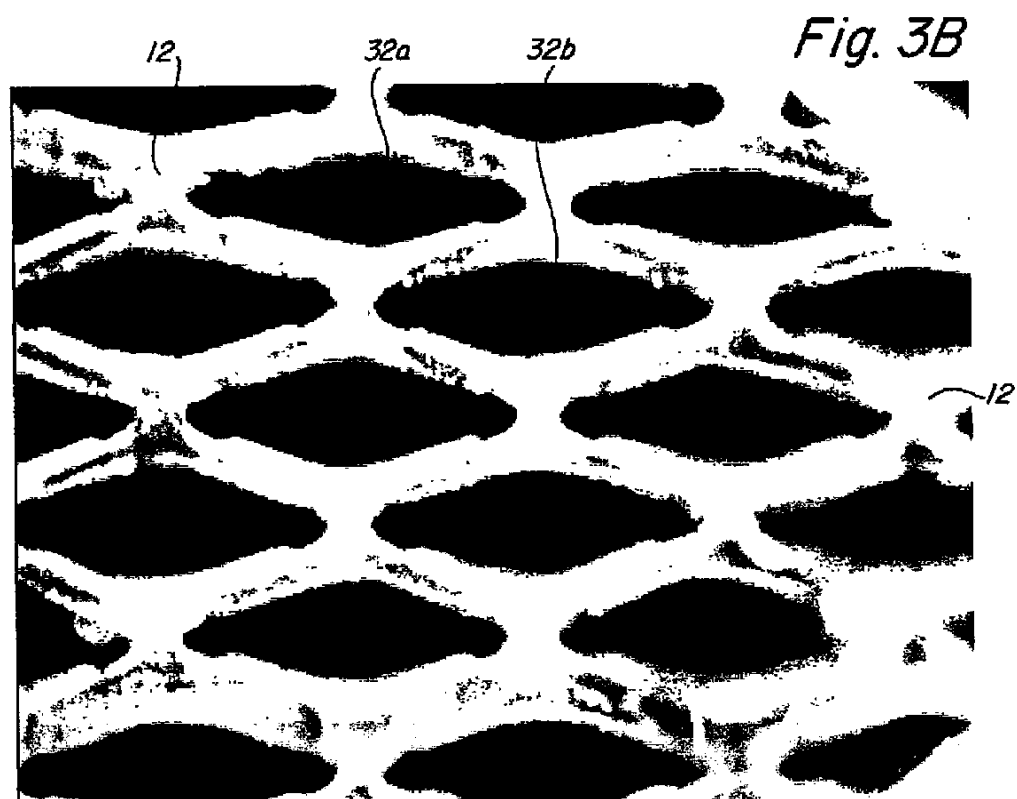


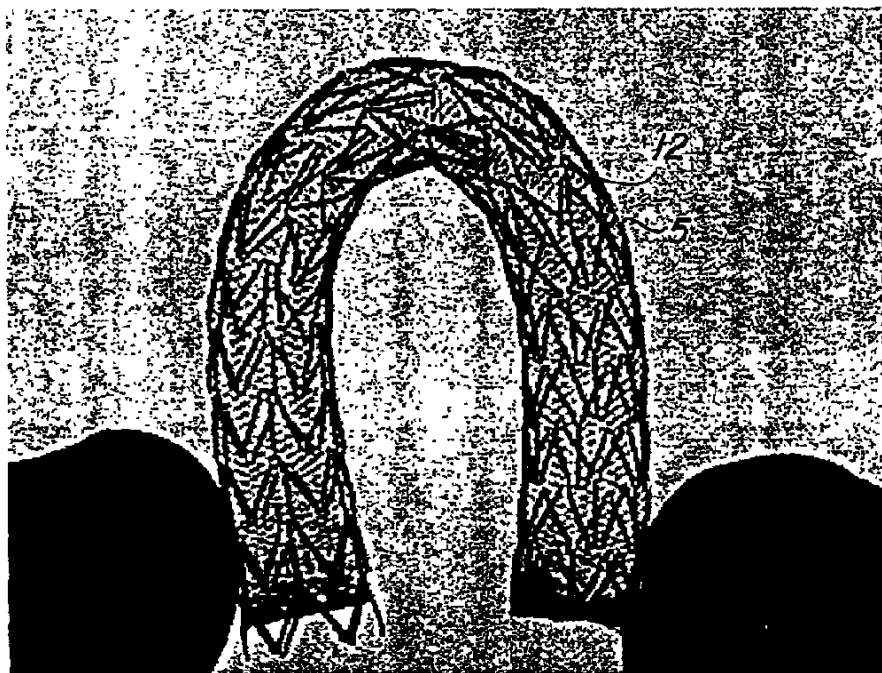


*Fig. 6*

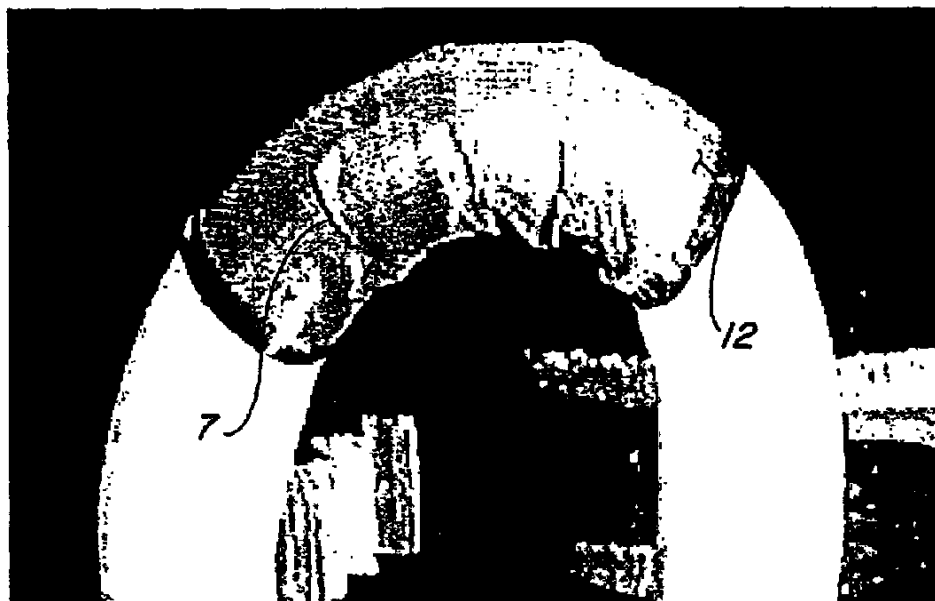

*Fig. 7*

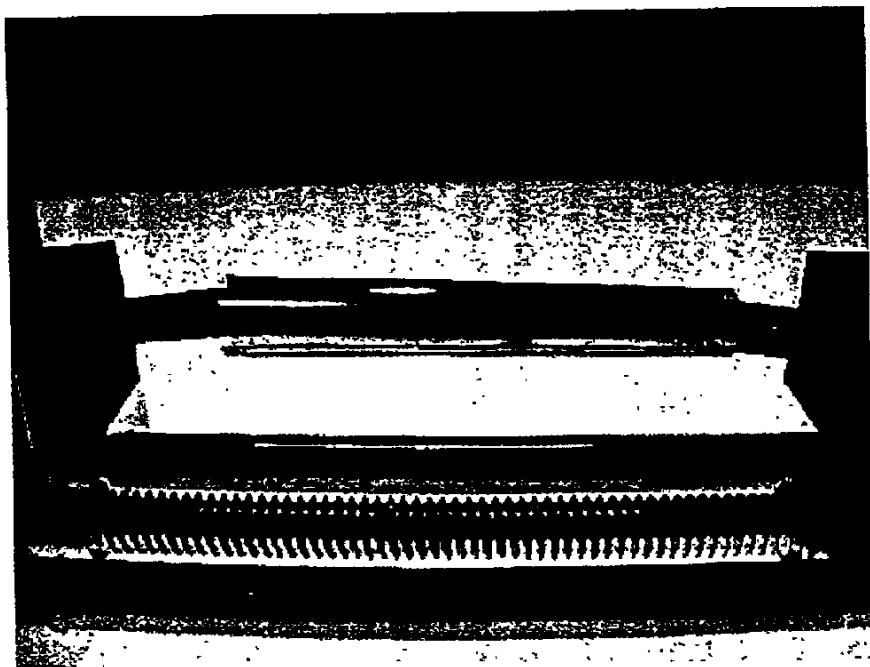

*Fig. 8A*

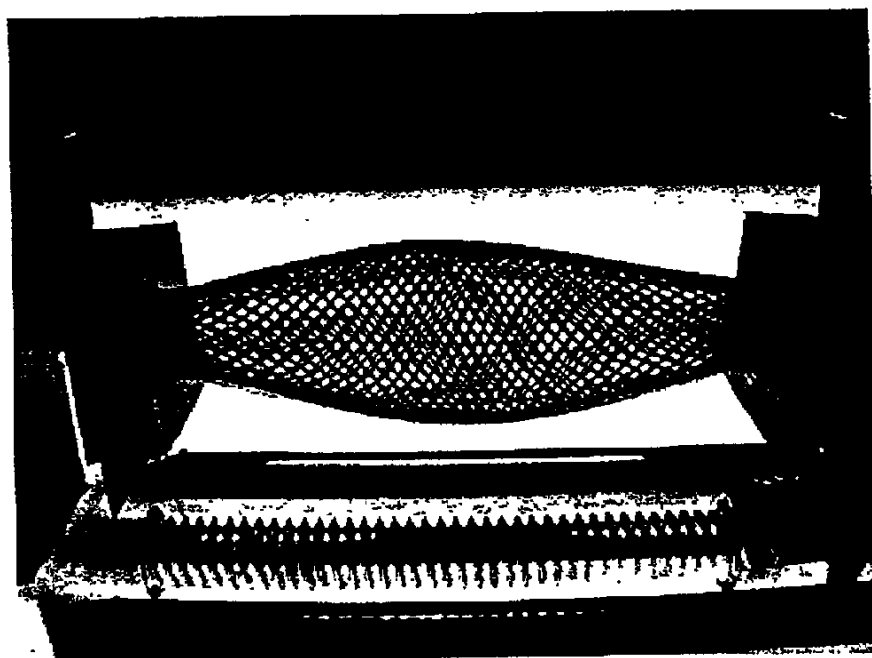

*Fig. 8B*



*Fig. 10A*



*Fig. 10B*

1

# COMPLAINT IMPLANTABLE MEDICAL DEVICES AND METHODS OF MAKING SAME

## CROSS REFERENCE TO RELATED APPLICATIONS

The present application corresponds to and claims priority to provisional patent application U.S. Ser. No. 60/302,797, filed Jul. 3, 2001 and is a continuation in part of commonly assigned U.S. patent application Ser. No. 09/443,929, filed Nov. 19, 1999, now U.S. Pat. No. 6,379,383, and Ser. No. 09/532,164 filed Mar. 20, 2000, now U.S. Pat. No. 6,537,310.

## BACKGROUND OF THE INVENTION

The present invention relates generally to implantable metallic medical devices. More specifically, the present invention relates to implantable medical devices, including, for example, surgical and endoluminal vascular grafts, stent grafts, skin grafts, shunts, bone grafts, surgical patches, non-vascular conduits, valvular leaflets, filters, occlusion membranes, sphincters, artificial tendons and ligaments. More specifically, the present invention relates to implantable medical grafts fabricated of metallic or pseudometallic films of biocompatible materials having a plurality of microperforations passing through the film. The plurality of microperforations may serve multiple purposes, including, for example, permitting geometric deformation of the film, imparting a fabric-like quality to the film, and imparting flexibility to the film. The term "fabric-like" is intended to mean a quality of being pliable and/or compliant in a manner similar to that found with natural or synthetic woven fabrics.

The inventive implantable grafts are fabricated entirely of self-supporting films made of biocompatible metals or biocompatible pseudometals. Heretofore in the field of implantable medical devices, it is unknown to fabricate an implantable medical device that comprises a graft at least as one of its elements, such as a stent graft, entirely of self-supporting metal or pseudometal materials. As used herein the term "graft" is intended to indicate any type of device or part of a device that comprises essentially a material delimited by two surfaces where the distance between said surfaces is the thickness of the graft and that exhibits integral dimensional strength and that has microperforations that pass through the thickness of the graft. The inventive grafts may be formed in planar sheets, toroids, and in other shapes as particular applications may warrant. However, for purposes of illustration only, the present application will refer to tubular grafts. For purposes of this application, the terms "pseudometal" and "pseudometallic" are intended to mean a biocompatible material which exhibits biological response and material characteristics substantially the same as biocompatible metals. Examples of pseudometallic materials include, for example, composite materials and ceramics. Composite materials are composed of a matrix material reinforced with any of a variety of fibers made from ceramics, metals, carbon, or polymers.

When implanted into the body, metals are generally considered to have superior biocompatibility than that exhibited by polymers used to fabricate commercially available polymeric grafts. It has been found that when prosthetic materials are implanted, integrin receptors on cell surfaces interact with the prosthetic surface. The integrin receptors are specific for certain ligands in vivo. If a specific protein is adsorbed on a prosthetic surface and the ligand exposed, cellular binding to the prosthetic surface may occur by

2

integrin-ligand docking. It has also been observed that proteins bind to metals in a more permanent fashion than they do to polymers, thereby providing a more stable adhesive surface. The conformation of proteins coupled to surfaces of most medical metals and alloys appears to expose greater numbers of ligands and preferentially attract endothelial cells having surface integrin clusters to the metal or alloy surface relative to leukocytes. Finally, metals and metal alloys exhibit greater resistance to degradation of metals relative to polymers, thereby providing greater long-term structural integrity and stable interface conditions.

Because of their relatively greater adhesive surface profiles, metals are also susceptible to short-term platelet activity and/or thrombogenicity. These deleterious properties may be offset by administration of pharmacologically active antithrombogenic agents in routine use today. Surface thrombogenicity usually disappears 1-3 weeks after initial exposure. Antithrombotic coverage is routinely provided during this period of time for coronary stenting. In non-vascular applications such as musculoskeletal and dental, metals have also greater tissue compatibility than polymers because of similar molecular considerations. The best article to demonstrate the fact that all polymers are inferior to metals is van der Giessen, W. J. et al. *Marked inflammatory sequelae to implantation of biodegradable and non-biodegradable polymers in porcine coronary arteries*, Circulation, 1996:94(7):1690-7.

Normally, endothelial cells (EC) migrate and proliferate to cover denuded areas until confluence is achieved. Migration, quantitatively more important than proliferation, proceeds under normal blood flow roughly at a rate of 25  $\mu\text{m/hr}$  or 2.5 times the diameter of an EC, which is nominally 10  $\mu\text{m}$ . EC migrate by a rolling motion of the cell membrane, coordinated by a complex system of intracellular filaments attached to clusters of cell membrane integrin receptors, specifically focal contact points. The integrins within the focal contact sites are expressed according to complex signaling mechanisms and eventually couple to specific amino acid sequences in substrate adhesion molecules. An EC has roughly 16-22% of its cell surface represented by integrin clusters. Davies, P. F., Robotewskyi A., Griem M. L. *Endothelial cell adhesion in real time*. J. Clin. Invest. 1993; 91:2640-2652, Davies, P. F., Robotewski, A., Griem, M. L., *Qualitative studies of endothelial cell adhesion*, J. Clin. Invest. 1994; 93: 2031-2038. This is a dynamic process, which implies more than 50% remodeling in 30 minutes. The focal adhesion contacts vary in size and distribution, but 80% of them measure less than 6  $\mu\text{m}^2$ , with the majority of them being about 1  $\mu\text{m}^2$ , and tend to elongate in the direction of flow and concentrate at leading edges of the cell. Although the process of recognition and signaling to determine specific attachment receptor response to attachment sites is incompletely understood, availability of attachment sites will favorably influence attachment and migration. It is known that materials commonly used as medical grafts, such as polymers, do not become covered with EC and therefore do not heal after they are placed in the arteries. It is therefore an object of this invention to replace polymer grafts with metal grafts that can potentially become covered with EC and can heal completely. Furthermore, heterogeneities of materials in contact with blood flow are preferably controlled by using vacuum deposited materials.

There have been numerous attempts to increase endothelialization of implanted medical devices such as stents, including covering the stent with a polymeric material (U.S. Pat. No. 5,897,911), imparting a diamond-like carbon coat-

ing onto the stent (U.S. Pat. No. 5,725,573), covalently binding hydrophobic moieties to a heparin molecule (U.S. Pat. No. 5,955,588), coating a stent with a layer of blue to black zirconium oxide or zirconium nitride (U.S. Pat. No. 5,649,951), coating a stent with a layer of turbostratic carbon (U.S. Pat. No. 5,387,247), coating the tissue-contacting surface of a stent with a thin layer of a Group VB metal (U.S. Pat. No. 5,607,463), imparting a porous coating of titanium or of a titanium alloy, such as Ti—Nb—Zr alloy, onto the surface of a stent (U.S. Pat. No. 5,690,670), coating the stent, under ultrasonic conditions, with a synthetic or biological, active or inactive agent, such as heparin, endothelium derived growth factor, vascular growth factors, silicone, polyurethane, or polytetrafluoroethylene, U.S. Pat. No. 5,891,507), coating a stent with a silane compound with vinyl functionality, then forming a graft polymer by polymerization with the vinyl groups of the silane compound (U.S. Pat. No. 5,782,908), grafting monomers, oligomers or polymers onto the surface of a stent using infrared radiation, microwave radiation or high voltage polymerization to impart the property of the monomer, oligomer or polymer to the stent (U.S. Pat. No. 5,932,299). However, all these approaches do not address the lack of endothelialization of polymer grafts.

It is, therefore, desirable to fabricate the inventive graft of metallic and/or pseudometallic materials. The inventive metal devices may be fabricated of pre-existing conventional wrought metallic materials, such as stainless steel or nitinol hypotubes, or may be fabricated by thin film vacuum deposition techniques. In accordance with the present invention, it is preferable to fabricate the inventive implantable devices by vacuum deposition. Vacuum deposition permits greater control over many material characteristics and properties of the resulting formed device. For example, vacuum deposition permits control over grain size, grain phase, grain material composition, bulk material composition, surface topography, mechanical properties, such as transition temperatures in the case of a shape memory alloy. Moreover, vacuum deposition processes will permit creation of devices with greater material purity without the introduction of large quantities of contaminants that adversely affect the material, mechanical or biological properties of the implanted device. Vacuum deposition techniques also lend themselves to fabrication of more complex devices than those susceptible of manufacture by conventional cold-working techniques. For example, multi-layer structures, complex geometrical configurations, extremely fine control over material tolerances, such as thickness or surface uniformity, are all advantages of vacuum deposition processing.

In vacuum deposition technologies, materials are formed directly in the desired geometry, e.g., planar, tubular, etc. The common principle of vacuum deposition processes is to take a material in a minimally processed form, such as pellets or thick foils, known as the source material and atomize them. Atomization may be carried out using heat, as is the case in physical vapor deposition, or using the effect of collisional processes, as in the case of sputter deposition, for example. In some forms of deposition, a process, such as laser ablation, which creates microparticles that typically consist of one or more atoms, may replace atomization; the number of atoms per particle may be in the thousands or more. The atoms or particles of the source material are then deposited on a substrate or mandrel to directly form the desired object. In other deposition methodologies, chemical reactions between ambient gas introduced into the vacuum chamber, i.e., the gas source, and the deposited atoms and/or

particles are part of the deposition process. The deposited material includes compound species that are formed due to the reaction of the solid source and the gas source, such as in the case of chemical vapor deposition. In most cases, the deposited material is then either partially or completely removed from the substrate, to form the desired product.

A first advantage of vacuum deposition processing is that vacuum deposition of the metallic and/or pseudometallic films permits tight process control and films may be deposited that have regular, homogeneous atomic and molecular pattern of distribution along their fluid-contacting surfaces. This avoids the marked variations in surface composition, creating predictable oxidation and organic adsorption patterns and has predictable interactions with water, electrolytes, proteins and cells. Particularly, EC migration is supported by a homogeneous distribution of binding domains that serve as natural or implanted cell attachment sites, in order to promote unimpeded migration and attachment.

Secondly, in addition to materials and devices that are made of a single metal or metal alloy, henceforth termed a layer, the inventive grafts may be comprised of a layer of biocompatible material or of a plurality of layers of biocompatible materials formed upon one another into a self-supporting multilayer structure because multilayer structures are generally known to increase the mechanical strength of sheet materials, or to provide special qualities by including layers that have special properties such as superelasticity, shape memory, radio-opacity, corrosion resistance etc. A special advantage of vacuum deposition technologies is that it is possible to deposit layered materials and thus films possessing exceptional qualities may be produced (cf., H. Holleck, V. Schier: *Multilayer PVD coatings for wear protection*, Surface and Coatings Technology, Vol. 76–77 (1995) pp. 328–336). Layered materials, such as superstructures or multilayers, are commonly deposited to take advantage of some chemical, electronic, or optical property of the material as a coating; a common example is an antireflective coating on an optical lens. Multilayers are also used in the field of thin film fabrication to increase the mechanical properties of the thin film, specifically hardness and toughness.

Thirdly, the design possibilities for possible configurations and applications of the inventive graft are greatly enhanced by employing vacuum deposition technologies. Specifically, vacuum deposition is an additive technique that lends itself toward fabrication of substantially uniformly thin materials with potentially complex three dimensional geometries and structures that cannot be cost-effectively achieved, or in some cases achieved at all, by employing conventional wrought fabrication techniques. Conventional wrought metal fabrication techniques may entail smelting, hot working, cold working, heat treatment, high temperature annealing, precipitation annealing, grinding, ablation, wet etching, dry etching, cutting and welding. All of these processing steps have disadvantages including contamination, material property degradation, ultimate achievable configurations, dimensions and tolerances, biocompatibility and cost. For example conventional wrought processes are not suitable for fabricating tubes having diameters greater than about 20 mm diameter, nor are such processes suitable for fabricating materials having wall thicknesses down to about 5  $\mu\text{m}$  with sub- $\mu\text{m}$  tolerances.

While the inventive self-supporting metal or pseudometal graft may be fabricated of conventionally fabricated wrought materials, in accordance with the best mode contemplated for the present invention, the inventive graft is

preferably fabricated by vacuum deposition techniques. By vacuum depositing the metal and/or pseudometallic film as the precursor material for the inventive graft, it is possible to more stringently control the material, biocompatibility and mechanical properties of the resulting film material and graft than is possible with conventionally fabricated graft-forming materials. The inventive self-supporting graft may be used alone, i.e., the whole implantable device may be made of a single graft, or it may be a part of a structure where the graft is used in conjunction either with other grafts, or in conjunction with other structural elements, such as scaffolds, stents, and other devices. The term "in conjunction" may mean actual connection, such as that made by welding, fusing, or other joining methods, as well as being made from the same piece of material by forming some area of the piece into a graft and some other area of the piece into another member or part of the device.

#### SUMMARY OF THE INVENTION

In accordance with a preferred embodiment of the invention, there is provided a self-supporting graft member having a plurality of microperforations passing through the wall thickness of the graft. The graft member may assume virtually any geometric configuration, including sheets, tubes or rings. The plurality of microperforations may serve to impart geometric compliance to the graft, geometric distendability to the graft and/or limit or permit the passage of body fluids or biological matter through the graft, such as facilitating transmural endothelialization while preventing fluid flow through the wall of the graft under normal physiological conditions. The plurality of microperforations may also impart a fabric-like quality to the graft by imparting pliability and/or elastic, plastic or superelastic compliance to the graft, such as that required for longitudinal flexibility in the case of a vascular graft.

In a first embodiment, the graft may be made from plastically deformable materials such that upon application of a force, the microperforations geometrically deform to impart permanent enlargement of one or more axes of the graft, such as length in the case of a planar graft, e.g., a surgical patch graft, or diameter, such as in the case of a tubular graft, e.g., a vascular graft. In a second embodiment, the graft may be fabricated of elastic or superelastic materials. Elastic and/or superelastic materials will permit the microperforations to geometrically deform under an applied force in a manner that allows for a recoverable change in one or more axes of the graft.

In each of the first and second embodiments of the invention, the graft may be fabricated in such a manner as to have fabric-like qualities by controlling the film thickness, material properties and geometry of the plurality of microperforations. Furthermore, in such cases where minimally invasive delivery is required, such as for endoluminal delivery of vascular grafts, the first and second embodiments allow for delivery using balloon expansion and self-expansion, respectively, or a combination of both. Minimally invasive delivery may also be accomplished by folding the graft for delivery similar to the manner in which an angioplasty balloon is creased and fluted or folded. The graft may be delivered by unfolding the device in vivo either by assistance such as by using a balloon, or by the graft material's plastic, elastic or superelastic properties or by a combination thereof. After delivery, the plurality of microperforations may be patterned in such a manner as to allow for additional dimensional enlargement of the graft member by elastic or plastic deformation such as a radially expansive positive pressure.

For some applications it is preferable that the size of each of the plurality of microperforations be such as to permit cellular migration through each opening, without permitting fluid flow there through. In this manner, for example, blood cannot flow through the plurality of microperforations (in their deformed or un-deformed state), but various cells or proteins may freely pass through the plurality of microperforations to promote graft healing in vivo. For other applications, moderate amounts of fluid flow through the plurality of deformed or un-deformed microperforations may be acceptable. For example, endoluminal saphenous vein grafts may be fabricated with microperforations that serve the dual function of permitting transmural endothelialization while also excluding biological debris, such as thrombus from passing through the wall thickness of the graft, effectively excluding detrimental matter from entering the circulation. In this example, each of the plurality of microperforations in either their deformed or undeformed state, may exceed several hundred microns.

Those skilled in the art will understand that a direct relationship exists between the size of pores and the overall ratio of expansion or deformability of an implantable graft. Generally, therefore, it is appreciated that pore sizes must increase in order to increase the effective attainable degree of expansion or deformation of the graft.

For applications where large deformation and small pore size are both requirements, in accordance with another aspect of the inventive graft embodiment, it is contemplated that two or more graft members are employed such as diametrically concentric grafts for tubular configurations. The two or more graft members have a pattern of a plurality of microperforations passing there through, with the plurality of patterned microperforations being positioned out of phase relative to one another such as to create a tortuous cellular migration pathway through the wall of the concentrically engaged first and second graft members as well as a smaller effective pore size. In order to facilitate cellular migration through and healing of the first and second graft members in vivo, it may be preferable to provide additional cellular migration pathways that communicate between the plurality of microperforations in the first and second graft members. These additional cellular migration pathways, if necessary, may be imparted as 1) a plurality of projections formed on either the luminal surface of the second graft or the abluminal surface of the first graft, or both, which serve as spacers and act to maintain an annular opening between the first and second graft members that permits cellular migration and cellular communication between the plurality of microperforations in the first and second graft members, 2) a plurality of microgrooves, which may be random, radial, helical, or longitudinal relative to the longitudinal axis of the first and second graft members, the plurality of microgrooves being of a sufficient size to permit cellular migration and propagation along the groove, the microgrooves serve as cellular migration conduits between the plurality of microperforations in the first and second graft members, or 3) where the microperforations cause out of plane motion of the graft material upon deformation thereby keeping a well defined space between the planes originally defining the facing surfaces of the grafts.

The graft member or members may be formed as a monolayer film, or may be formed from a plurality of film layers formed one upon another. The particular material used to form each layer of biocompatible metal and/or pseudometal is chosen for its biocompatibility, corrosion-fatigue resistance and mechanical properties, i.e., tensile strength, yield strength. The metals include, without limitation, the

following: titanium, vanadium, aluminum, nickel, tantalum, zirconium, chromium, silver, gold, silicon, magnesium, niobium, scandium, platinum, cobalt, palladium, manganese, molybdenum and alloys thereof, such as zirconium-titanium-tantalum alloys, nitinol, and stainless steel. Additionally, each layer of material used to form the graft may be doped with another material for purposes of improving properties of the material, such as radiopacity or radioactivity, by doping with tantalum, gold, or radioactive isotopes.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of the inventive graft.

FIG. 2A is a fragmentary plan view depicting a first pattern of microperforations useful in the present invention.

FIG. 2B is a fragmentary plan view depicting a second pattern of microperforations useful in the present invention.

FIG. 2C is a fragmentary plan view depicting a third pattern of microperforations useful in the present invention.

FIG. 2D is a fragmentary plan view depicting a fourth pattern of microperforations useful in the present invention.

FIG. 3A is a photomicrograph depicting the inventive graft having the first pattern of microperforation depicted in FIG. 2A in a geometrically undeformed state.

FIG. 3B is a photomicrograph of the inventive graft illustrated in FIG. 3A showing the microperforations in a geometrically deformed state.

FIG. 4 is a diagrammatic illustration depicting geometric deformation of the fourth pattern of microperforations in FIG. 2D.

FIG. 5 is a diagrammatic cross-sectional view illustration depicting the inventive graft assuming a folded condition suitable for endoluminal delivery.

FIG. 6 is a photographic illustration of the inventive graft as a stent covering.

FIG. 7 is a photographic illustration of the inventive graft deformed approximately 180 degrees along its longitudinal axis illustrating the fabric-like quality of the graft.

FIG. 8A is a photographic illustration of the inventive graft circumferentially covering a braided expansion member and mounted on an expansion jig that exerts a compressive force along the longitudinal axis of the braided expansion member and which radially expands the braided expansion member.

FIG. 8B is a photographic illustration of the inventive graft radially exhibiting radial compliance under the influence of a radially expansive force.

FIG. 9 is a flow diagram depicting alternate embodiments of making the inventive graft.

FIG. 10A is a histology slide, stained with hematoxylin and eosin, from a 28 day explanted swine carotid artery having the inventive graft implanted therein.

FIG. 10B is a histology slide, stained with hematoxylin and eosin, from a 28 day explanted swine carotid artery having the inventive graft implanted therein.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With the foregoing as background, we turn now to a description of the present invention with reference the preferred embodiments thereof and with reference to the accompanying figures. As noted above, the inventive microporous metallic implantable devices may assume a

wide number of geometric configurations, including, for example, planar sheets, tubes or toroids. For ease of reference, however, the accompanying figures and the following description of the invention will refer to tubular implantable graft members. Those skilled in the art, however, will understand that this is merely an exemplary geometric configuration and is not intended to limit the scope of the invention to tubular members or be limited in application to graft members.

With particular reference to FIG. 1, the inventive implantable medical device is illustrated as a graft 10. Graft 10 consists generally of a body member 12 having a first surface 14 and a second surface 16 and a thickness 18 intermediate the first surface 14 and the second surface 16. A plurality of microperforations 20 is provided and pass through the thickness 18 of the body member 12 with interperforation regions 22 of the body member 12 between adjacent microperforations 20. The plurality of microperforations 20 each preferably have a geometric configuration that is susceptible of geometric change, such that the open surface area of each microperforation 20 may change under an externally applied load. Each of the plurality of microperforations 20 in the undeformed state preferably has an open surface area less than about 2 mm<sup>2</sup>, with the total open surface area of the graft in the undeformed state being between 0.001 to 99%. The open surface area of the plurality of microperforations and the open surface area of the graft may change considerably upon deformation of the plurality of microperforations 20. Both the size of the microperforations 20 in the deformed and undeformed state and the total open area of the graft 12 in the deformed and undeformed state may be selected in view of the following non-exclusive factors based on the graft application: 1) the desired compliance of the graft 10, 2) the desired strength of the graft 10, 3) desired stiffness of the graft 10, 4) the desired degree of geometric enlargement of the microperforations 20 upon deformation and 5) in some cases, such as with vascular grafts, the desired delivery profile and post delivery profile.

In accordance with a preferred embodiment of the present invention, the plurality of microperforations 20 is patterned in such a manner as to define deformation regions of the body member 12. The thickness 18 is between 0.1  $\mu$ m and 75  $\mu$ m, preferably between 1  $\mu$ m and 50  $\mu$ m. When fabricated within these thickness ranges, the graft 10 has a thickness 18 which is thinner than the wall thickness of conventional non-metallic implantable grafts and that of conventional metal endoluminal stents.

The plurality of microperforations is patterned in a regular array forming a regular array of microperforations 20 in both the longitudinal and circumferential axes of the body member 12. For purposes of reference, the pattern of microperforations 20 will, hereinafter, be described with reference to a planar X-Y axes, which in a tubular member will correspond to the longitudinal or circumferential axes of the tubular member. Those of ordinary skill in the art will understand that reference to X-axis or Y-axis when applied to a tubular member may be used such that the X-axis may correspond to either the longitudinal axis or circumferential direction of the tubular member and the Y-axis may also be translated to the corresponding circumferential direction or longitudinal axis or the tubular member.

It will be appreciated by those of ordinary skill in the art that individual different geometric patterns may have associated intended uses, function or mechanical requirements of a particular device. Thus, the particular intended use of the implantable member 12 will be a consideration in the selection of the particular geometric pattern for the plurality

of microperforations 20. For example, where the implantable member 12 has an intended use as a free-standing implantable endoluminal vascular graft, a large circumferential expansion ratio, significant hoop strength and longitudinal flexibility may be desirable. Thus, a particular geometry of the plurality of microperforations 20 that offers these properties will be selected. The plurality of microperforations 20 also affect the material properties of the implantable member 10. For example, the geometry each microperforation 20 may be altered so that each microperforation 20 exhibits stress-strain relief capabilities or the microperforations 20 may control whether geometric deformation of the microperforations 20 are plastic, elastic or superelastic deformation. Thus, both the geometry of the individual microperforations 20, the orientation of the microperforations 20 relative to the X-Y axis of the implantable member 10 and the pattern of the microperforations 20 may be selected to directly impart, affect or control the mechanical and material properties of the implantable member 10.

Different geometric patterns for the plurality of microperforations 20 in accordance with the preferred embodiments of the invention are illustrated in FIGS. 2A-2C. FIG. 2A illustrates a first geometry for each of the plurality of microperforations 30. In accordance with this first geometry, each of the plurality of microperforations 30 consist of generally elongated slots 32a, 32b. Each of the generally elongated slots 32a, 32b preferably include terminal fillets 34 on opposing ends of each elongated slot 32a, 32b. The terminal fillets 34 serve a strain relief function that aids in strain distribution through the interperforation regions 22 between adjacent slots 32. FIG. 2A further illustrates a first geometric pattern for the plurality of microperforations 32a, 32b, wherein a first row of a plurality of microperforations 32a is provided with adjacent microperforations 32a being arrayed in end-to-end fashion along a common axis, and a second row of a plurality of microperforations 32b is provided with adjacent microperforations 32b being arrayed in end-to-end fashion along a common axis with one another and with the microperforations 32a. The first row of microperforations 32a and the second row of microperforations 32b are offset or staggered from one another, with an end of a microperforation 32a being laterally adjacent to an intermediate section of a microperforation 32b, and an end of microperforation 32b being laterally adjacent an intermediate section of a microperforation 32a.

The first geometry 30 of the plurality of microperforations 32a, 32b illustrated in FIG. 2A permits a large deformation along an axis perpendicular to a longitudinal axis of the slots. Thus, where the longitudinal axis of slots 32a, 32b is co-axial with the longitudinal axis of the implantable member 10, deformation of the slots 32a, 32b will permit circumferential compliance and/or expansion of the implantable member 10. Alternatively, where the longitudinal axis of the slots 32a, 32b is parallel to the circumferential axis of the implantable member 10, the slots 32a, 32b permit longitudinal compliance, flexibility and expansion of the implantable member 10.

FIG. 2B illustrates a second geometry 40 for the plurality of microperforations 20 and consists of a plurality of microperforations 42a, 44b, again having a generally elongate slot-like configuration like those of the first geometry 30. In accordance with this second geometry 40, individual microperforations 42a and 44b are oriented orthogonal relative to one another. Specifically, a first microperforation 42a is oriented parallel to an X-axis of the implantable member 10, while a first microperforation 44b is positioned adjacent to the first microperforation 44a along the X-axis,

but the first microperforation 44b is oriented perpendicular to the X-axis of the implantable member 10 and parallel to the Y-axis of the implantable member 10. Like the first geometry, each of the plurality of microperforations 42a, 44b may include a terminal fillet 44 at opposing ends of the slot of each microperforation in order to serve a strain relief function and transmit strain to the interperforation region 22 between adjacent microperforations. This second geometry 40 offers a balance in both compliance and degree of expansion in both the X and Y-axes of the implantable device 12.

In each of FIGS. 2A and 2B, each of the microperforations 32a, 32b, 42a, 44b has a generally longitudinal slot configuration. Each of the generally longitudinal slots may be configured as a generally linear or curvilinear slot. In accordance with the preferred embodiments of the invention, however, it is preferred to employ generally linear slots.

FIG. 2C illustrates a third preferred geometry 50 for the plurality of microperforations. In accordance with this third geometry 50, each of the plurality of microperforations 52 has a generally trapezoidal or diamond-like shape with interperforation graft regions 56 between adjacent pairs of microperforations 52. It will be appreciated that the third geometry 50 may be achieved by geometrically deforming the first geometry 30 along an axis perpendicular to the longitudinal axis of the plurality of microperforations 32a, 32b. Similarly, the first geometry 30 may be achieved by deforming microperforations 52 in the third geometry 50 along either an X-axis or a Y-axis of the implantable member 10.

FIGS. 3A and 3B are photomicrographs illustrating the inventive implantable device 12 having a plurality of microperforations formed as generally longitudinal slots 32a, 32b in accordance with the first geometry depicted in FIG. 2A. Each of the plurality of microperforations were formed with an orientation parallel to the longitudinal axis of the implantable device 12. The implantable device 12 consists of a 6 mm inner diameter NiTi shape memory tubular graft member having a wall thickness of 5  $\mu$ m. FIG. 3A depicts the plurality of microperforations 32a and 32b in their undeformed state, while FIG. 3B depicts the plurality of microperforations 32a and 32b in their geometrically deformed state under the influence of a strain applied perpendicular to the longitudinal axis of the implantable graft 12. It may be clearly understood that geometric deformation of the plurality of microperforations 32a, 32b permitted circumferential expansion of the inventive graft. The dimensions of each of the plurality of microperforations in their undeformed state depicted in FIGS. 3A and 3B was 430  $\mu$ m in length, 50  $\mu$ m width, with the terminal fillets having a 50  $\mu$ m diameter.

In accordance with a fourth geometry of the plurality of microperforations 20 illustrated in FIGS. 2D and 4, each of the plurality of microperforations 20 have a generally trilegged or Y-shaped configuration. The Y-shaped configuration of each of the plurality of microperforations 20 has three co-planar radially projecting legs 31a, 31b, 31c, each offset from the other by an angle of about 120 degrees thereby forming a generally Y-shape. Each of the three co-planar radially projecting legs 31a, 31b, 31c may be symmetrical or asymmetrical relative to one another. However, in order to achieve uniform geometric deformation across the entire graft body member 12, it is preferable that each of the plurality of microperforations 20 has geometric symmetry. Those skilled in the art will recognize that beyond the two particular patterns described here any number of different

11

patterns may be used without significantly departing from the inventive graft concept described in the present patent.

Those skilled in the art will understand that each of the microperforations 20 are capable of undergoing deformation upon application of a sufficient force. In a tubular geometry, the graft 12 may deform both circumferentially and longitudinally. As is illustrated in FIG. 3a, each of the plurality of elongated slots may deform into opened microperforations which assume a generally rhomboidal shape. Similarly, Y-shaped microperforations 20 shown in 4 are capable of deformation into generally circular or oval open microperforations 21. The deformation regions 22 between adjacent microperforations 20 facilitate deformation of each of the plurality of microperforations 20 by deforming to accommodate opening of each of the plurality of microperforations 20.

As depicted in FIG. 5, the inventive graft 12 may be folded to assume a smaller diametric profile for endoluminal delivery. In order to facilitate folding, the pattern of the plurality of microperforations 20 may be fashioned to create a plurality of folding regions 23, that constitute relatively weakened regions of the graft 12, to permit folding the graft 12 along folding regions 23.

FIG. 6 is a photographic illustration of the inventive microporous graft 12 circumferentially mounted onto an endoluminal stent 5. It may be readily seen that the microporous graft 12 exhibits mechanical properties of high longitudinal flexibility and both radial and circumferential compliance.

FIG. 7 is a photographic illustration of the inventive microporous graft 12 mounted onto mandrel and flexed approximately 180 degrees along its longitudinal axis. Upon longitudinal flexion, the inventive graft 12 undergoes a high degree of folding with a plurality of circumferentially oriented folds 7, characteristic of its fabric-like qualities.

FIGS. 8A and 8B are photographic reproductions illustrating the high degree of circumferential compliance of the inventive microporous graft 12. A 6 mm microporous graft having a 5  $\mu$ m wall thickness was mounted concentrically over a braided pseudostent. An axial force was applied along the longitudinal axis of the braided pseudostent causing the pseudostent to radially expand and exert a circumferentially expansive force to the inventive graft 12. As is clearly depicted in FIGS. 8A and 8B the plurality of micropores in the inventive graft 12 geometrically deform thereby permitting circumferential expansion of the graft 12.

Thus, one embodiment of the present invention provides a new metallic and/or pseudometallic implantable graft that is biocompatible, geometrically changeable either by folding and unfolding or by application of a plastically, elastically or superelastically deforming force, and capable of endoluminal delivery with a suitably small delivery profile. Suitable metal materials to fabricate the inventive graft are chosen for their biocompatibility, mechanical properties, i.e., tensile strength, yield strength, and their ease of fabrication. The compliant nature of the inventive graft material may be employed to form the graft into complex shapes by deforming the inventive graft over a mandrel or fixture of the appropriate design. Plastic deformation and shape setting heat treatments may be employed to ensure the inventive implantable members 10 retain a desired conformation.

According to a first preferred method of making the graft of the present invention, the graft is fabricated of vacuum deposited metallic and/or pseudometallic films. With particular reference to FIG. 9, the fabrication method 100 of the present invention is illustrated. A precursor blank of a

12

conventionally fabricated biocompatible metal or pseudometallic material may be employed at step 102. Alternatively, a precursor blank of a vacuum deposited metal or pseudometallic film may be employed at step 104. The precursor blank material obtained either from step 102 or step 104 is then preferably masked at step 108 leaving exposed only those regions defining the plurality of microperforations. The exposed regions from step 108 are then subjected to removal either by etching at step 110, such as by wet or dry chemical etching processing, with the etchant being selected based upon the material of the precursor blank, or by machining at step 112, such as by laser ablation or EDM. Alternatively, when employing the vacuum deposition step 104, a pattern mask corresponding to the plurality of microperforations may be interposed at step 106 between the target and the source and the metal or pseudometal deposited through the pattern mask to form the patterned microperforations. Further, when employing the vacuum deposition step 104, plural film layers maybe deposited to form a multilayer film structure of the film prior to or concurrently with forming the plurality of microperforations.

Thus, the present invention provides a new metallic and/or pseudometallic implantable graft that is biocompatible, compliant, geometrically changeable either by folding and unfolding or by application of a plastically, elastically or superelastically deforming force, and, in some cases, capable of endoluminal delivery with a suitably small delivery profile and suitably low post-delivery profile. Suitable metal materials to fabricate the inventive graft are chosen for their biocompatibility, mechanical properties, i.e., tensile strength, yield strength, and in the case where vapor deposition is deployed, their ease of deposition include, without limitation, the following: titanium, vanadium, aluminum, nickel, tantalum, zirconium, chromium, silver, gold, silicon, magnesium, niobium, scandium, platinum, cobalt, palladium, manganese, molybdenum and alloys thereof, such as zirconium-titanium-tantalum alloys, nitinol, and stainless steel. Examples of pseudometallic materials potentially useful with the present invention include, for example, composite materials and ceramics.

The present invention also provides a method of making the inventive expandable metallic graft by vacuum deposition of a graft-forming metal or pseudometal and formation of the microperforations either by removing sections of deposited material, such as by etching, EDM, ablation, or other similar methods, or by interposing a pattern mask, corresponding to the microperforations, between the target and the source during deposition processing. Alternatively, a pre-existing metal and/or pseudometallic film manufactured by conventional non-vacuum deposition methodologies, such as wrought hypotube or sheet, may be obtained, and the microperforations formed in the pre-existing metal and/or pseudometallic film by removing sections of the film, such as by etching, EDM, ablation, or other similar methods. An advantage of employing multilayer film structures to form the inventive graft is that differential functionalities may be imparted in the discrete layers. For example, a radiopaque material such as tantalum may form one layer of a structure while other layers are chosen to provide the graft with its desired mechanical and structural properties.

In accordance with the preferred embodiment of fabricating the inventive microporous metallic implantable device in which the device is fabricated from vacuum deposited nitinol tube, a cylindrical deoxygenated copper substrate is provided. The substrate is mechanically and/or electropol-

13

ished to provide a substantially uniform surface topography for accommodating metal deposition thereupon. A cylindrical hollow cathode magnetron sputtering deposition device was employed, in which the cathode was on the outside and the substrate was positioned along the longitudinal axis of the cathode. A cylindrical target consisting either of a nickel-titanium alloy having an atomic ratio of nickel to titanium of about 50–50% and which can be adjusted by spot welding nickel or titanium wires to the target, or a nickel cylinder having a plurality of titanium strips spot welded to the inner surface of the nickel cylinder, or a titanium cylinder having a plurality of nickel strips spot welded to the inner surface of the titanium cylinder is provided. It is known in the sputter deposition arts to cool a target within the deposition chamber by maintaining a thermal contact between the target and a cooling jacket within the cathode. In accordance with the present invention, it has been found useful to reduce the thermal cooling by thermally insulating the target from the cooling jacket within the cathode while still providing electrical contact to it. By insulating the target from the cooling jacket, the target is allowed to become hot within the reaction chamber. Two methods of thermally isolating the cylindrical target from the cooling jacket of the cathode were employed. First, a plurality of wires having a diameter of 0.0381 mm were spot welded around the outer circumference of the target to provide an equivalent spacing between the target and the cathode cooling jacket. Second, a tubular ceramic insulating sleeve was interposed between the outer circumference of the target and the cathode cooling jacket. Further, because the Ni—Ti sputtering yields can be dependant on target temperature, methods which allow the target to become uniformly hot are preferred.

The deposition chamber was evacuated to a pressure less than or about  $2\text{--}5 \times 10^{-7}$  Torr and pre-cleaning of the substrate is conducted under vacuum. During the deposition, substrate temperature is preferably maintained within the range of 300 and 700 degrees Centigrade. It is preferable to apply a negative bias voltage between 0 and –1000 volts to the substrate, and preferably between –50 and –150 volts, which is sufficient to cause energetic species arriving at the surface of the substrate. During deposition, the gas pressure is maintained between 0.1 and 40 mTorr but preferably between 1 and 20 mTorr. Sputtering preferably occurs in the presence of an Argon atmosphere. The argon gas must be of high purity and special pumps may be employed to reduce oxygen partial pressure. Deposition times will vary depending upon the desired thickness of the deposited tubular film. After deposition, the plurality of microperforations are formed in the tube by removing regions of the deposited film by etching, such as chemical etching, ablation, such as by excimer laser or by electric discharge machining (EDM), or the like. After the plurality of microperforations are formed, the formed microporous film is removed from the copper substrate by exposing the substrate and film to a nitric acid bath for a period of time sufficient to remove dissolve the copper substrate.

#### EXAMPLE

A 5  $\mu\text{m}$  thick NiTi graft having a pattern of microperforations consisting of parallel staggered longitudinally oriented linear slots, each slot being 430  $\mu\text{m}$  length, 25  $\mu\text{m}$  width, and having 50  $\mu\text{m}$  diameter fillets on each end of each linear slot, was mounted onto a 6 mm NiTi stent and delivered endoluminally to the left carotid artery of a swine. After 28 days, the swine was euthanized, and the graft explanted from the left carotid artery. Samples were prepared using standard hematoxylin and eosin staining

14

procedures, and microscope slides prepared. As illustrated in FIG. 10A histology of the explanted samples revealed complete endothelialization around the graft 12, negligible neointimal proliferation with the absence of trauma to the internal elastic lamina. FIG. 10B is a sample indicating cross-talk between the arterial superficial and deep layers with the transmural formation of small capillaries.

While the present invention has been described with reference to its preferred embodiments, those of ordinary skill in the art will understand and appreciate that variations in materials, dimensions, geometries, and fabrication methods may be or become known in the art, yet still remain within the scope of the present invention which is limited only by the claims appended hereto.

What is claimed is:

1. An implantable medical device, comprising:

- a. a generally tubular, non-coiling body member comprising a film selected from the group consisting of metallic and pseudometallic materials and having a first surface, a second surface and a thickness intermediate the first surface and the second surface; and
- b. a plurality of microperforations passing through the thickness of the body member and communicating between the first surface and the second surface, whereby said plurality of microperforations geometrically deform to permit diametric expansion of the body member and impart compliance to the body member.

2. The implantable medical device according to claim 1, wherein the body member further comprises a generally torroidal annular ring-shaped member.

3. The implantable medical device according to claim 1, wherein the thickness of the graft body member between 0.1  $\mu\text{m}$  and 50  $\mu\text{m}$ .

4. The implantable medical device according to claim 1, wherein the plurality of microperforations is arrayed in at least one pattern sufficient to impart at least one of compliance and pliability to the body member.

5. The implantable medical device according to claim 4, wherein said plurality of microperforations further comprise a plurality of slots arrayed substantially parallel to at least one of a longitudinal axis and a circumferential direction of the graft.

6. The implantable medical device according to claim 5, wherein each of the plurality of slots has a generally elongate linear configuration.

7. The implantable medical device according to claim 6, wherein each of the plurality of slots further comprise terminal fillets positioned at opposing ends of each of the plurality of slots.

8. The implantable medical device according to claim 7, wherein the elongated slot configuration further comprises a first plurality of slots oriented parallel to the longitudinal axis of the graft and a second plurality of slots oriented parallel to the circumferential axis of the graft, the first plurality of slots and the second plurality of slots being positioned generally orthogonal relative to one another.

9. The implantable medical device according to claim 1, wherein said plurality of microperforations further comprise a plurality of generally diamond-shaped openings.

10. The implantable medical device according to claim 1, wherein each of the plurality of microperforations have an open surface area less than about 2  $\text{mm}^2$  when the graft is in an undeformed state.

11. The implantable medical device according to claim 1, wherein the plurality of microperforations create a total open surface area of the graft in an undeformed state between about 0.001 to 99%.

## 15

12. The implantable medical device according to claim 1, wherein the graft thickness is within the range of about 0.1  $\mu\text{m}$  to 75  $\mu\text{m}$ .

13. The implantable medical device according to claim 12, wherein the graft thickness is within the range of about 1  $\mu\text{m}$  to 50  $\mu\text{m}$ .

14. A method of fabricating the graft according to claim 1, comprising the steps of:

- a. Providing a sacrificial substrate suitable;
- b. Vacuum depositing at least one of a metallic and pseudometallic biocompatible material onto the sacrificial substrate thereby forming a film of the biocompatible material;
- c. Imparting a plurality of microperforations passing through the film of biocompatible material thereby forming the implantable graft; and
- d. Separating the sacrificial substrate from the formed implantable graft.

15. The method according to claim 14, wherein the step c. further comprises the step of removing portions of the biocompatible material to form the plurality of microperforations.

16. The method according to claim 14, wherein the removing step is selected from the steps of chemical etching, laser ablation and electrical discharge machining.

## 16

17. A method of fabricating the graft according to claim 1, comprising the steps of:

- a. providing a pre-existing blank of at least one of a biocompatible metallic and pseudometallic material;
- b. removing sections of the pre-existing blank material to form a plurality of microperforations passing through the pre-existing blank material.

18. The method according to claim 17, wherein the removing step is selected from the steps of chemical etching, laser ablation and electrical discharge machining.

19. An implantable medical device, consisting essentially of:

- a. a generally tubular, non-coiled body member comprising a self-supporting film selected from the group consisting of metallic and pseudometallic materials and having a first surface, a second surface and a thickness intermediate the first surface and the second surface; and
- b. a plurality of microperforations passing through the thickness of the body member and communicating between the first surface and the second surface, whereby said plurality of microperforations geometrically deform to permit diametric expansion of the body member and impart compliance to the body member.

\* \* \* \* \*